



FAP 30

Industrial Range

- 1) Ratings in accordance with ISO 8528. For duty at temperature over 50°C and/or altitude over 1000 meters must be considered a power derating factor.
- 2) Net power at flywheel available after 50 hours running with a ±3% tolerance

PRIME POWER: The prime power is the maximum power available with varying loads for an unlimited number of hours. The average power output during a 24h period of operation must not exceed 80% of the declared prime power between the prescribed maintenance intervals and at standard environmental conditions. A 10% overload is permissible for 1 hour every 12 hours of operation.



SILENT PLUS



DIESEL



WATER COOLED



3 PHASE

Hz

50 Hz

About Generator

Service	Unit	PRP	ESP
Power	kVA	34	36
Power	kW	27	29
Rated Speed	RPM	1500	
Standard Voltages	V	400 / 230	
Available Voltages	V	230/ 132	230 V(t)
Rated at Power Factor	V	CosØ	0.8

Engine Dimensions

Length (L)	mm	962
Width (W)	mm	621
Height (H)	mm	979
Dry Weight	kg	370

Engine Specification @ 1500 RPM

Rated Output-net	kWm	28
Rated Output-net (ESP)	kWm	31
Manufacturer	FPT_IVECO	
Model	80313AM1P	
Engine Type	4-Stroke Diesel	
Injection Type	Direct	
Aspiration Type	Naturally Aspirated	
Number of Cylinders	3-L	
Bore & Stroke	mm	104 x115
Displacement	L	2.9
Compression Ratio	17.5:1	

Fuel Consumption

Fuel Consumption ESP	L/h	8.3
Fuel Consumption PRP @ 100%	L/h	7.1
Fuel Consumption PRP @ 80%	L/h	5.7
Fuel Consumption PRP @ 50%	L/h	3.8
Lube Oil Consumption with Full Load	L	< 0.1% of fuel consumption
Total Oil Capacity	L	10.2
Total Coolant Capacity	L	14
Governor Type	Mechanical	
Air Filter	Dry	

Alternator Specifications

Manufacturer	Stamford / Leroy Somer	
Model	PI144G/ TAL042C	
Number of Poles	4	
Connection Type (Standard)	Star Series	
Insulation Class	H	
Encloser	IP23	
Exciter System	Self Excitation Brush Less	
Bearing	Single Bearing	

- Diesel Engine
 - 4 Stroke cycle
 - Water Cooled
 - 12V Electric Starting System
 - Water Separator Filter (No Visible Level)
 - Dry Air Filter
 - Radiator with Pusher Fan
 - Mechanical Governor
 - Hot Parts Protection
 - Moving Parts Protection
 - HTW Sender (Optional)
 - Radiator Water Level Sensor
 - Electronic AVR
 - Flexible dick type Coupling System
 - Standard (vacuum impregnation)
- Coating Type
- IP23 Protection

Application Data

Exhaust System

Gas Flow at stand-by Power	kg/h	153
Max Temperature at PRP (25°C)	°C	525
Max Allowable Back Pressure	kPa(mbar)	7(70)
Energy to Exhaust	kW	641

Necessary Amount of Air/ Air Intake System

Air Consumption @ 100% of Load	m ³ /h (Kg/h)	125(146)
Air Intake restriction, Clean filter	kPa (mbar)	2.5(25)


Lubrication System

Oil Sump Capacity (Max)	liter	7.7
Oil System Capacity	liter	8.8
Oil Temperature	°C	125
Servicing Interval	Hrs	500

- Manhole to fill the radiator.
- Manhole for fuel tank cleaning and drainage
- Oversized chassis to protect the bodywork.
- Slide carriage and brackets for transportation with Fork Lifter
- Tilting cap in the exhaust
- Anti-vibration shock absorbers
- Fuel level gauge
- Bodywork made from high quality steel plate.
- High mechanical strength
- Low noise emissions level
- Soundproofing
- Epoxy powder coating
- Full access for maintenance (water, oil and filters, no need to remove the canopy)
- Reinforced lifting hooks for crane hoisting
- Steel residential silencer

Generator Dimensions

Length (L)	mm	1798.32
Width (W)	mm	975.36
Height (H)	mm	1341.12
Silencer	mm	335.28
Fuel Tank Capacity	Ltrs	105

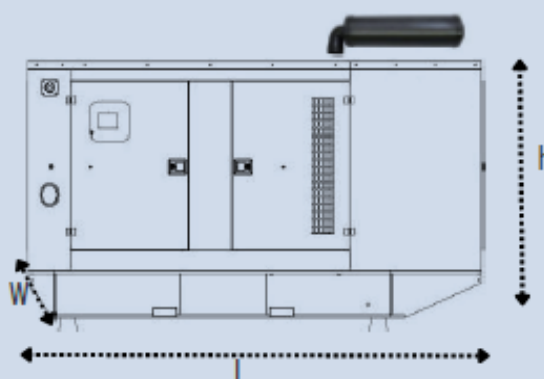

- External filling of the fuel tank with safety key
- Emergency stop button (double emergency)
- Safety Module DeepSea
- Stop protection: Interior on the panel
- Exterior on the bodywork
- Mechanized for power cable output.
- Door with window to visualize control panel, alarms and measurements.
- IP Protection according to ISO 8528
- Certified with ISO9001, EDB, PEC & E-in-C