



# FPZ 400

## Industrial Range

- 1) Ratings in accordance with ISO 8528. For duty at temperature over 50°C and/or altitude over 1000 meters must be considered a power derating factor.
- 2) Net power at flywheel available after 50 hours running with a ±3% tolerance

**PRIME POWER:** The prime power is the maximum power available with varying loads for an unlimited number of hours. The average power output during a 24h period of operation must not exceed 80% of the declared prime power between the prescribed maintenance intervals and at standard environmental conditions. A 10% overload is permissible for 1 hour every 12 hours of operation.

## About Generator


Service	Unit	PRP	ESP
Power	kVA	418	460
Power	kW	334	368
Rated Speed	RPM	1500	
Standard Voltages	V	400 / 230	
Available Voltages	V	230/ 132	230 V(t)
Rated at Power Factor	V	CosØ	0.8

## Engine Dimensions

Length (L)	mm	2324
Width (W)	mm	1270
Height (H)	mm	1546.5
Dry Weight	kg	1228



SILENT PLUS



DIESEL



WATER COOLED



3 PHASE

Hz

50 Hz

## Engine Specification @ 1500 RPM

Rated Output-net	kWm	352
Rated Output-net (ESP)	kWm	387
Manufacturer	FPT_IVECO	
Model	C13TE3A	
Engine Type	4-Stroke Diesel	
Injection Type	Direct-ECR	
Aspiration Type	TCA	
Number of Cylinders	6-L	
Bore & Stroke	mm	135 x 150
Displacement	L	12.88
Compression Ratio	16.5:1	

## Fuel Consumption

Fuel Consumption ESP	L/h	100.5
Fuel Consumption PRP @ 100%	L/h	85.8
Fuel Consumption PRP @ 80%	L/h	70.4
Fuel Consumption PRP @ 50%	L/h	42.8
Lube Oil Consumption with Full Load	L	< 0.1% of fuel consumption
Total Oil Capacity	L	35
Total Coolant Capacity	L	68
Governor Type	Electrical	
Air Filter	Dry	

## Alternator Specifications

Manufacturer	Stamford / Leroy Somer	
Model	HCI434F/444F/ TAL046J	
Number of Poles	4	
Connection Type (Standard)	Star Series	
Insulation Class	H	
Encloser	IP23	
Exciter System	Self Excitation Brush Less	
Bearing	Single Bearing	

- Diesel Engine
- 4 Stroke cycle
- Water Cooled
- 12V Electric Starting System
- Water Separator Filter (No Visible Level)
- Dry Air Filter
- Radiator with Pusher Fan
- Mechanical Governor
- Hot Parts Protection
- Moving Parts Protection
- HTW Sender (Optional)
- Radiator Water Level Sensor
- Electronic AVR
- Flexible dick type Coupling System
- Standard (vacuum impregnation)
- Coating Type
- IP23 Protection

## Application Data

### Exhaust System

Gas Flow at stand-by Power	kg/h	2210
Max Temperature at PRP (25°C)	°C	445
Max Allowable Back Pressure	kPa(mbar)	5(50)
Energy to Exhaust	kW	703

### Necessary Amount of Air/ Air Intake System

Air Consumption @ 100% of Load	m <sup>3</sup> /h (Kg/h)	1770(2131.5)
Air Intake restriction, Clean filter	kPa (mbar)	2(20)


### Lubrication System

Oil Sump Capacity (Max)	liter	27
Oil System Capacity	liter	35
Oil Temperature	°C	125
Servicing Interval	Hrs	500

- Manhole to fill the radiator.
- Manhole for fuel tank cleaning and drainage
- Oversized chassis to protect the bodywork.
- Slide carriage and brackets for transportation with Fork Lifter
- Tilting cap in the exhaust
- Anti-vibration shock absorbers
- Fuel level gauge
- Bodywork made from high quality steel plate.
- High mechanical strength
- Low noise emissions level
- Soundproofing
- Epoxy powder coating
- Full access for maintenance (water, oil and filters, no need to remove the canopy)
- Reinforced lifting hooks for crane hoisting
- Steel residential silencer

## Generator Dimensions

Length (L)	mm	3810
Width (W)	mm	1645
Height (H)	mm	2179
Silencer	mm	335.28
Fuel Tank Capacity	Ltrs	635

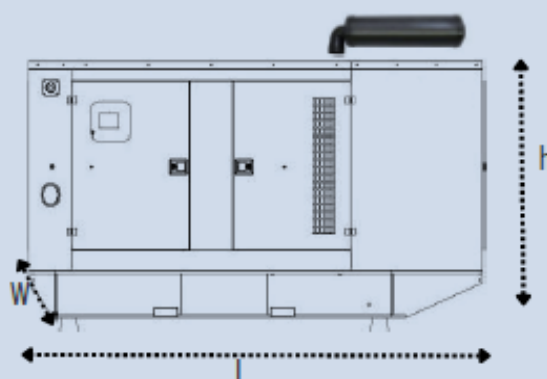

- External filling of the fuel tank with safety key
- Emergency stop button (double emergency)
- Safety Module DeepSea
- Stop protection: Interior on the panel
- Exterior on the bodywork
- Mechanized for power cable output.
- Door with window to visualize control panel, alarms and measurements.
- IP Protection according to ISO 8528
- Certified with ISO9001, EDB, PEC & E-in-C